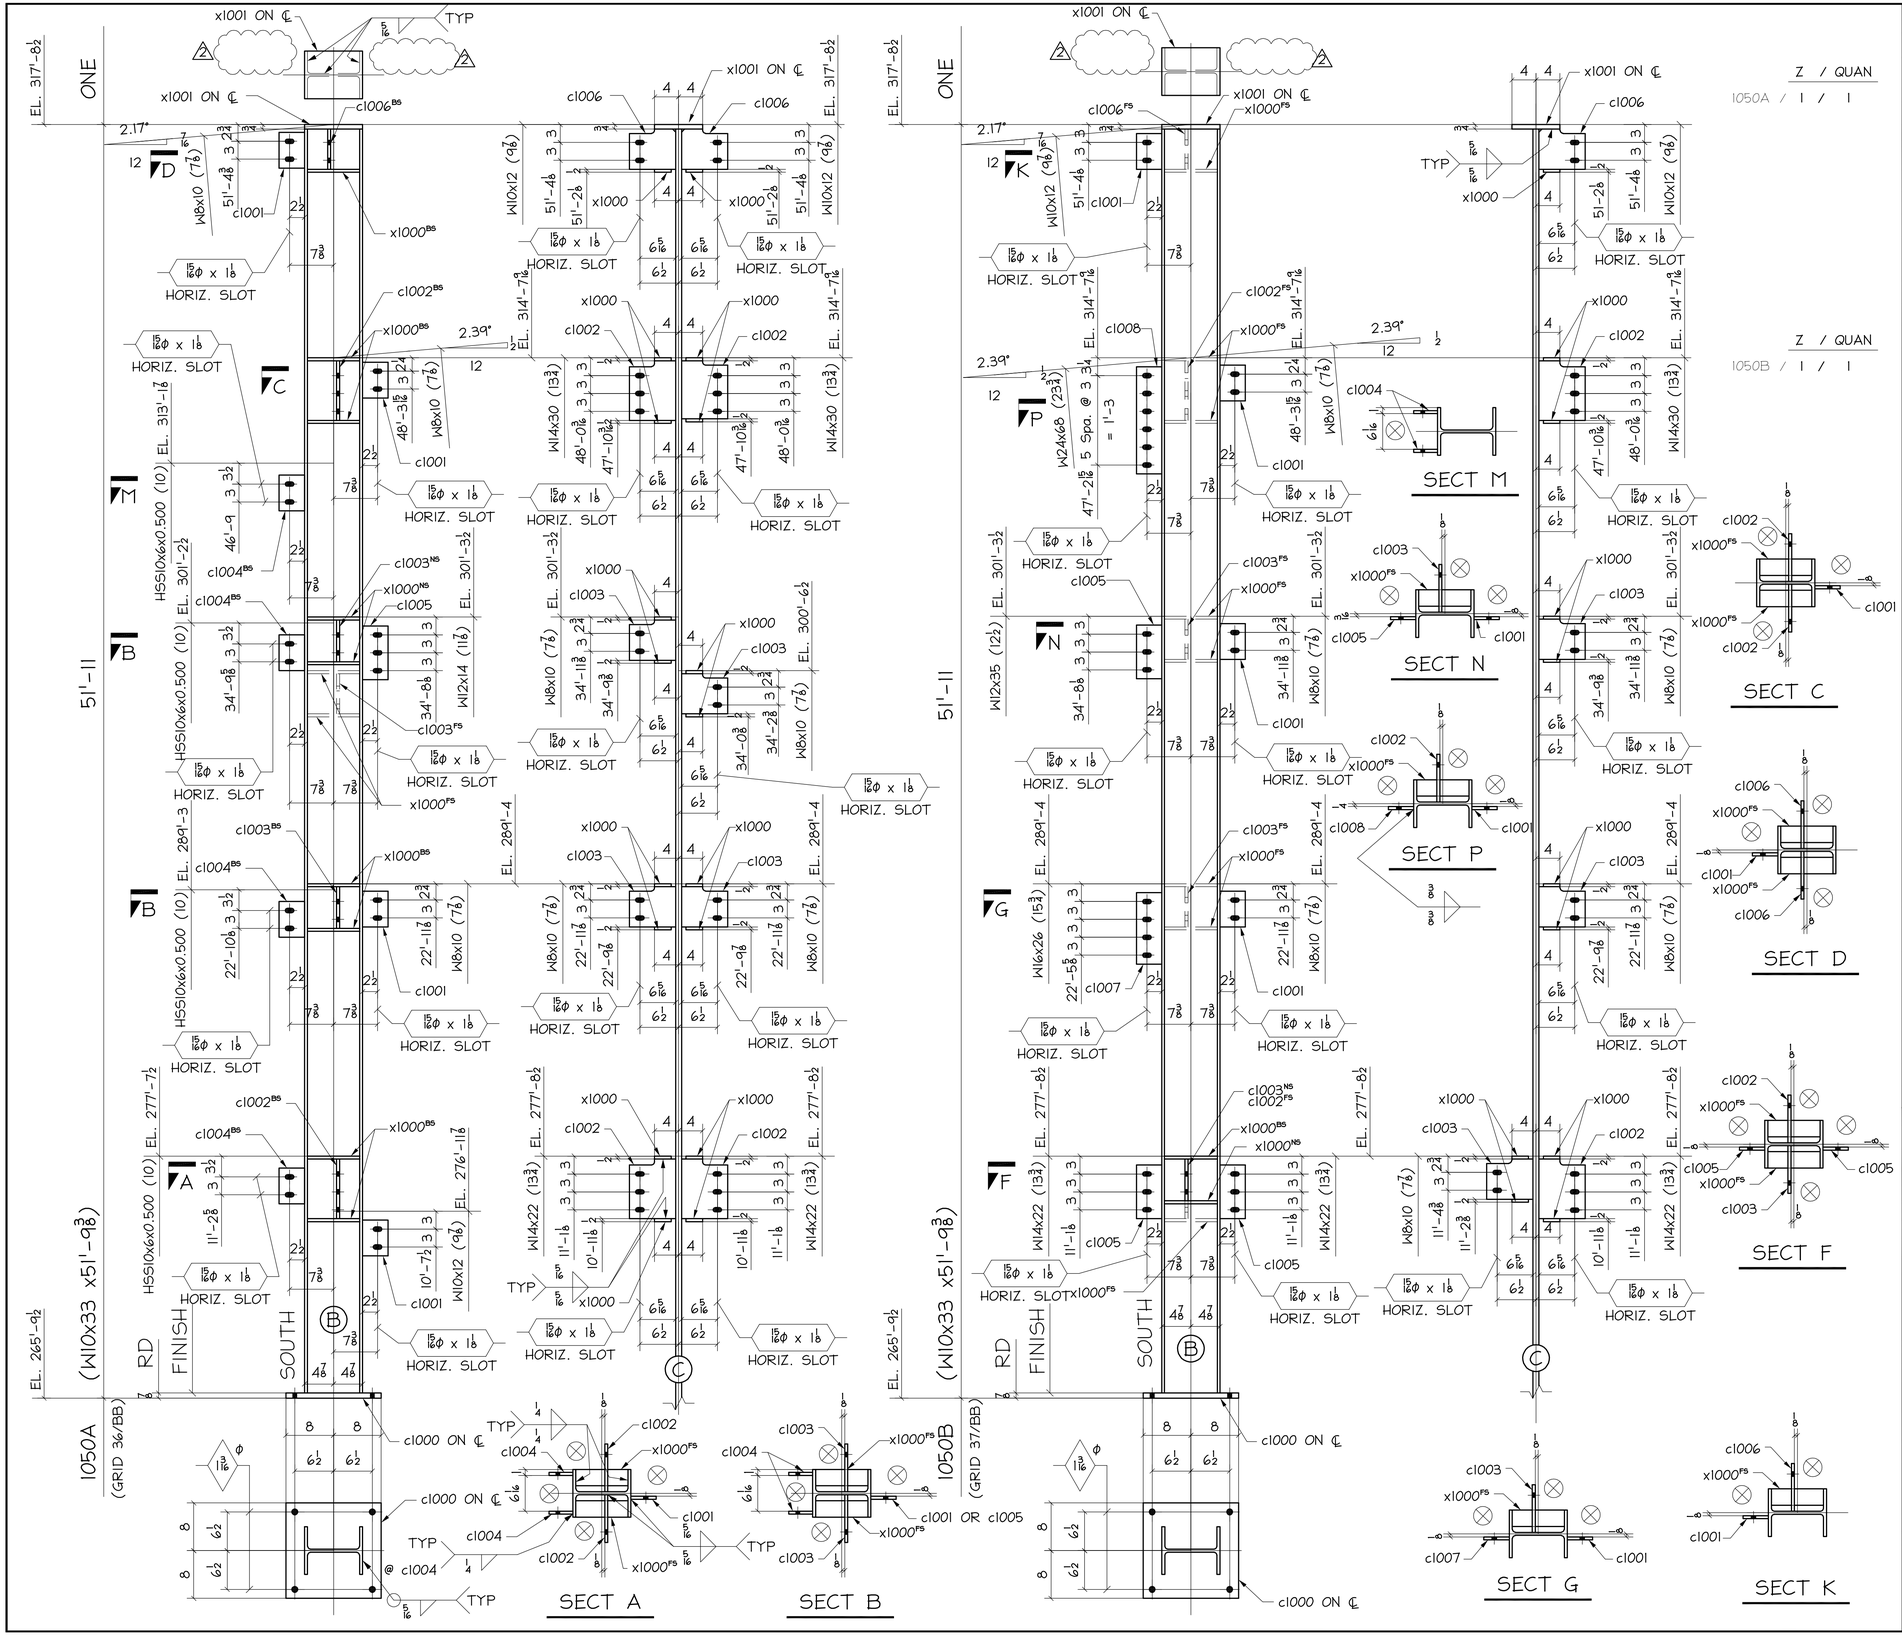

BILL OF MATERIAL

NO. to SHIP	SHIP MARK	TOTAL No Pc	PC MARK	DESCRIPTION	LENGTH FT.	LENGTH IN.	REMARKS	ADV. BILL	WEIGHT UNIT	WEIGHT TOTAL
ONE	1050A			W10x33	51	9⅜	FIE			
		1	c1000	PL⅞ x16	1	4				
		4	c1001	PL⅜ x4¼	0	6				
		4	c1002	PL⅜ x8⅛	0	10				
		4	c1003	PL⅜ x6¾	0	8⅛				
		8	c1004	PL⅝ x4¼	0	6				
		1	c1005	PL⅜ x4¼	0	9				
		2	c1006	PL⅜ x6¾	0	8⅛				
		18	x1000	PL½ x2¾	0	8¾				
		1	x1001	FB8x¾	0	9¾				
ONE	1050B			W10x33	51	9⅜	FIE			
		1	c1000	PL⅞ x16	1	4				
		4	c1001	PL⅜ x4¼	0	6				
		2	c1002	PL⅜ x8⅛	0	10				
		3	c1003	PL⅜ x6¾	0	8⅛				
		3	c1005	PL⅜ x4¼	0	9				
		1	c1006	PL⅜ x6¾	0	8⅛				
		1	c1007	PL⅜ x4¼	1	0				
		1	c1008	PL½ x4¼	1	6				
		11	x1000	PL½ x2¾	0	8¾				
		1	x1001	FB8x¾	0	9¾				

Z / QUAN
1050A / 1 / 1
1050B / 1 / 1

FABRICATION NOTES:

HOLES UNO: 15/16ϕ
WELD: E70XX (LH)
REF DWG: ABI E1000 E1001 E1004
MATERIAL UNO: A36 W=A992 GR50
HSS=A500 GRB
PAINT: NONE

NOTES:

VERIFICATION OF DIMENSIONS, DETAILS, AND ETC. ARE REQUESTED, WHERE INDICATED. IF EACH VERIFICATION IS NOT NOTED OTHERWISE, IT WILL BE ASSUMED TO BE CORRECT AS SHOWN.

REV	DATE	BY	DESCRIPTION	DWG STATUS	DATE
				FOR FABRICATION	
2	6/19/08	gα	removed butt weld symbol per discussion with KGA	FOR FABRICATION	
1	6/12/08	GA	FABRICATION	FOR PURCHASING	
A	5/30/08	WT	For Approval	FOR APPROVAL	

SPRINGBROOK PROPERTIES
THE ALLISON
2500 N. SPRINGBROOK ROAD, NEWBERG, OR

ENG'R: KGA | ADI / ANGLE DETAILING, INC.
CONT'R: LCL | ADI JOB# 31-028-001

COLUMBIA WIRE & IRON WORKS
5555 N. Channel Portland, Ore. 97217
www.cwil.com/503-286-6600

DRAWN BY:	CHKD BY:	JOB NO.	DWG. NO.	
XY	DZH	31-028-001	1050	2

J:\COLUMBIA-WIRE-AND-IRON\31-028-001(SPRINGBROOK)\SHOPS\1050.DWG 12/31/08 9:27am FORD melissa.mosley